



HVD200/24 SERIES

PRECISION HIGH VOLTAGE DIVIDER

200 kV DC | 0.2% ACCURACY


HIGH VOLTAGE SOLUTIONS

HVD200/24 | 01

PRECISION MEASUREMENT

The HVD200/24 is a precision divider for measuring DC voltages up to 200 kV DC. Its high input impedance minimizes circuit loading, while the toroidal high-voltage termination supports corona-free operation at rated voltage.

Designed for use with high-impedance digital, differential, or data-acquisition instrumentation.



200 kV DC

MAXIMUM INPUT

4000 MOhms

INPUT IMPEDANCE

40 kOhms

OUTPUT IMPEDANCE

2 V (1 V = 100 kV)

OUTPUT SCALING

SPECIFICATIONS

Rated input voltage	200 kV DC
Input impedance	4000 MOhms
Output impedance	40 kOhms
Output tap	2 V (1 V = 100 kV)
Accuracy	0.2%
Temperature coefficient	75 ppm/°C
S version	HVD200S/24; 25 ppm/°C temperature coefficient
Overall height	24 in
Maximum width	10 in
Input termination	10 in toroid
Output connection	BNC connector; 20 ft RG cable

ORDERING GUIDE

STANDARD

HVD200/24


75 ppm/°C

S VERSION

HVD200S/24

25 ppm/°C

MECHANICAL DRAWING

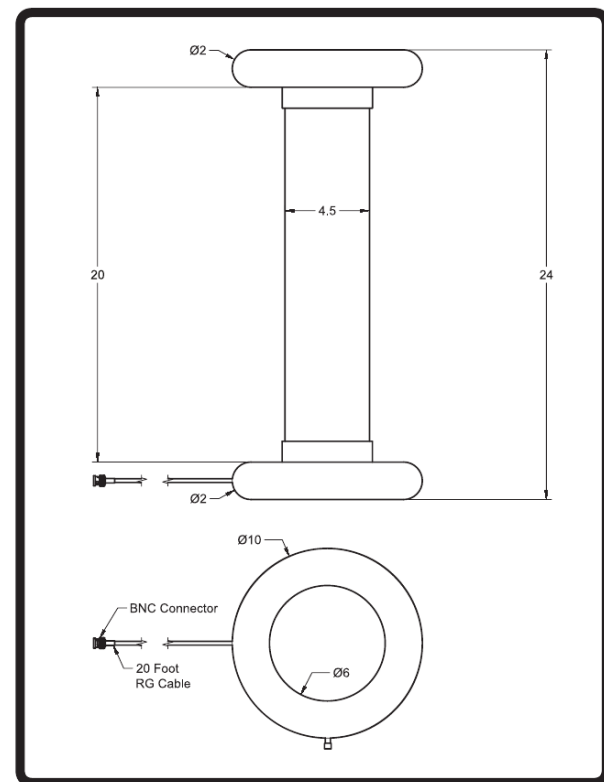

HIGH VOLTAGE SOLUTIONS

©2026 Gamma High Voltage Research | HVD200/24 Data Sheet | Rev A

Get in touch

+1 386-677-7070

gammahv.com

1096 N US Highway 1, Suite 109 | Ormond Beach, FL 32174